




**Aeration
Industries®**

AIRE-O₂® Aspirator Aerator

The Trusted Industry Workhorse Since 1974

The AIRE-O₂® aerator is a high quality, minimal maintenance aspirator aerator with superior performance and a proven record. Aeration Industries International, Inc. developed and introduced the innovative, patented aspirator aeration technology in 1974. The aerator creates a high velocity stream of oxygen that keeps solids in suspension and in contact with the plume of fine bubbles. A series of strategically placed units creates "flow linkage," providing whole basin aeration and circulation that prevents short-circuiting. More than 50,000 AIRE-O₂® aerators have been installed throughout the U.S. and over 85 countries worldwide making it the standard by which durability and quality are measured.

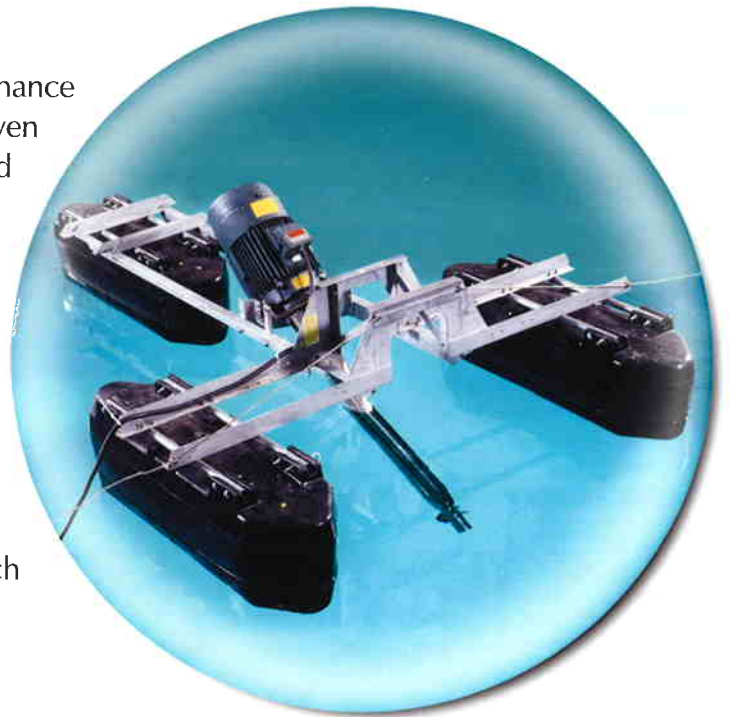

AIRE-O₂® Aspirator Aerator Benefits:

- Increased mixing and fine bubble oxygen dispersion.
- Low capital cost investment.
- Large range of Hp sizes adaptable to numerous applications, processes and configurations.
- Adjustable angle of entry allows for shallow to deep applications.
- Ease of installation, portability and minimal maintenance.
- Winter treatment performance efficiency.
- No aerosols or odors, "community friendly."
- Ideal for retrofits and upgrades.
- Three (3) Year Warranty.

Available in 2-100 Hp (1.5-75 kW) sizes in worldwide voltage, phase, Hz combinations



20 years and going strong!

"The 8 aerators allow for a turn down in oxygen transfer capability while assuring complete mixing of the ditch under all load conditions. We like the AIRE-O₂ system. Maintenance is easy."

Madison WWTP, SD




AIRE-O₂ aerators pictured mounted on floats. Bridge mounting shown above.


AIRE-O₂[®] Aspirator Aerator

Mounting Options:


For anchor mounting details please contact the factory.




Bridge Mount



Float Mount



Wall Mount

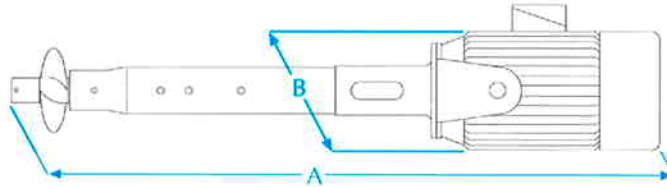

60 / 50 Hz Weights & Measures for the AIRE-O₂[®] Aspirator Aerator:

NEMA AND IEC Motors Available

HP	kw	Dimensions		Motor Frame Size	Motor 60 hz RPM	Motor 50 hz RPM	Motor 60 hz FLA@ 460V	Motor 50 hz FLA@ 380V	Ship weight lbs. (kg)	Pontoon System Avail.	Pontoon System
		A In. (m)	B In. (m)								
2	1.5	67 (1.70)	15 (.38)	180TC	3505	2945	3.6	6.3	226 (103)	a,b	a Intra-Pond
3	2.2	67 (1.70)	15 (.38)	184TC	3505	2900	4.6	5.2	244 (111)	a,b	b Tri-pontoon
5	4	67 (1.70)	15 (.38)	184TC	3480	2890	6.8	8.6	246 (112)	a,b	c Quad-pontoon
7.5	5.5	69 (1.75)	17 (.43)	213TC	3505	2845	10.2	6.26	286 (130)	a,b	d Penta-pontoon
10	7.5	75 (1.91)	16 (.41)	215TC	3500	2910	12.5	13.8	360 (163)	b	e Hexa-pontoon
15	11	81 (2.06)	17.5 (.44)	254TC	3510	2850	19.4	29.1	465 (211)	b	f Hepta-pontoon
20	15	81 (2.06)	17.5 (.44)	256TC	3500	1465	25	36.3	470 (213)	b	g Octa-pontoon
25	18.5	83 (2.11)	22 (.56)	284TC	3510	1465	32	43.9	720 (327)	b,c	
30	22	83 (2.11)	22 (.56)	286TC	3510	1469	38	58.3	769 (349)	b,c	Pontoon systems available for 50 hz / 60 hz may vary. Contact factory.
40	30	93 (2.36)	25 (.64)	324TC	1765	1473	50	72.6	1350 (612)	d	
50	37	93 (2.36)	25 (.64)	326TC	1765	1473	61	82.9	1775 (805)	d	
60	45	93 (2.36)	30 (.76)	364TC	1775	1473	70	102	1885 (855)	e	FRAME SIZE, RPM, FLA, and SHIP WEIGHTS may vary between motor manufacturers.
75	55	93 (2.36)	30 (.76)	365TC	1775	1473	86	137	1895 (860)	e	
100	75	93 (2.36)	31 (.79)	405TC	1775	1477	115	169	1930 (875)	g	

Data subject to change without notice.



Cape Town: 021 201 2147

Johannesburg: 011 813 1083

Ballito: 032 586 3344

www.circuit.co.za | info@circuit.co.za

AIRSpec1004-01